

HVOD ECO HARDWARE DATA SHEET



HARDWARE INFO



The Bi3 Eco Mini functions with a 75% decrease in power draw as compared to a standard Davantis Compact unit. This feature allows it to operate for extended durations on off-grid rapid deployment systems or continuously with solar-powered CCTV systems.

Dimensions	114.8mm x 101.9mm x 39.1mm
CPU	Intel Adler Lake-N N100 - Max Turbo Frequency 3.4GHz (4C/4T) 6MB Smart Cache
Graphics	Intel UHD Graphics 750MHz(24EUs)
Internal Slot	8GB DDR4 RAM
System Disk	256GB M.2 SSD
Max Power Draw	(800ma -1200ma)
Full Load	12vdc0 (800ma -1200ma) - 15 Watts
Working Temperature	0C--40C, 90% @40C Humidity
Storage Temperature	20C--40C, 90% @40C Humidity
Weight (Hardware Only)	Only Device (HDD Not Included): 280g
Display	2x HDMI (Max 4k 60Hz)
USB	2x USB 3.2 Gen 2(10Gbps) *4 (2 Front, 2 Rear)
Networking	Bluetooth 5.2
Relay Outputs	Optional 8 Input/ 8 Output USB Relay Module N/C, 5Amps at 12V DC
Interface	5.5*2.5 DC Jack Realte 8111H 1000M 3.5mm Phone Jack (Two-in-one)
Accessories	HDMI cable 100CM HDMI cable 25CM Adapter 12v/3A



ECO MINI LAYOUT

Inputs, Outputs, Connectors, Indicators LEDs, and Power/resetButtons

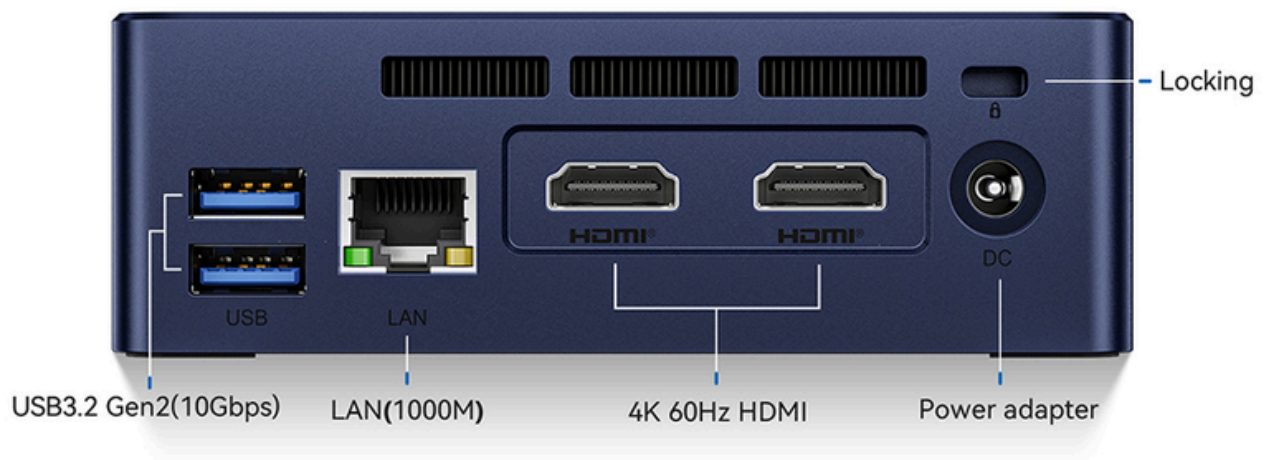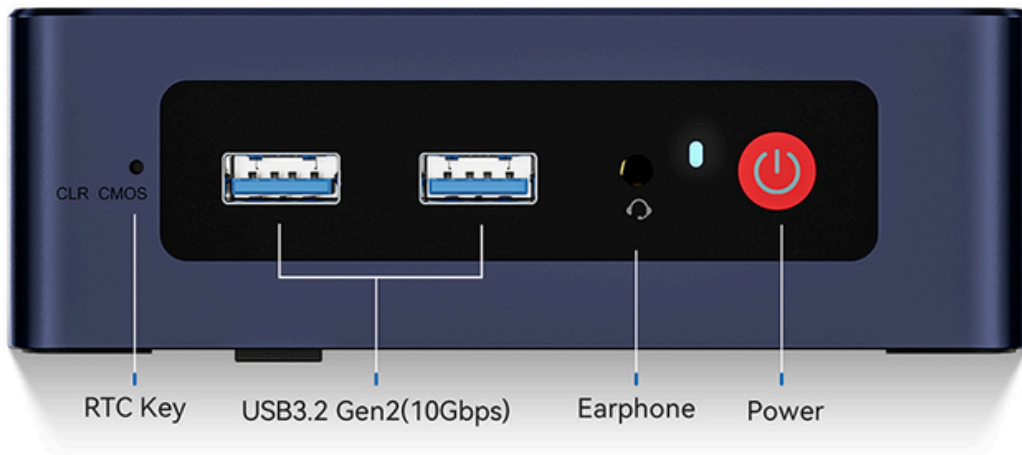



FOR FURTHER INFORMATION



01772 330 777



INFO@BI3.CO.UK



WWW.BI3.CO.UK



"Experts in Human, Vehicle and Object Detection"

Business Insight 3 Ltd, Preston Technology Centre, Marsh Lane, Preston, PR1 8UQ

01772 330 777 Email: info@bi3.co.uk Website: www.bi3.co.uk

Registered in England & Wales No. 8946421 | VAT Reg No: 973 9515 74